


FABRICAIR COMBI 65

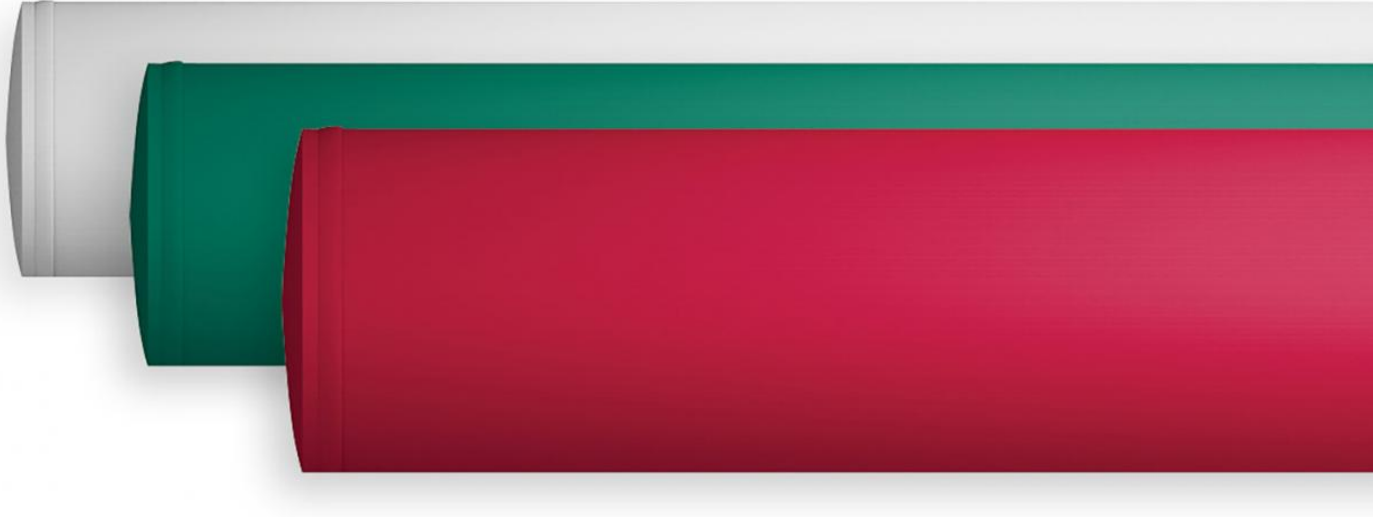

FabricAir® Combi is available as permeable and non-permeable fabrics. All fabric variants are exceptionally strong and durable and come with 5 or 10-year warranties.

FabricAir® Combi is Oeko-Tex 100 certified. The fabric is machine washable and retains its dimensions after washing (max. 0.5% shrinkage). The permeability is uniform (max. 5% variation).

FabricAir® Combi 80 and Combi 90 are supplied with an antimicrobial treatment, which is specially developed for areas with strict hygiene requirements.

The fabric is supplied in standard colors, with the option of surface print and other custom prints.

STANDARD COLORS

DYE COLOR	SURFACE PRINT	GRAPHIC PRINT
WHITE 3000 BLUE 3001 ORANGE 3002 DARK GRAY 3003 BLACK 3004 RED 3005 LIGHT GRAY 3006 GREEN 3007 TAN 3008	FabricAir Combi 20, 60, 70 and 80 Dye Coloring Seamless Patterns	Artwork Logos Lettering ✓ ✓ ✓

The fabric is non-permeable and comes with a 10 year warranty.

FEATURES

- ✓ Non-permeable (<http://fabricair.biz/es/fabricair-ducts/features/non-permeable>)
- ✓ Durable and strong weave (<http://fabricair.biz/es/fabricair-ducts/features/durable-and-strong-weave>)
- ✓ Certificate, Oeko-Tex standard 100 (<http://fabricair.biz/es/fabricair-ducts/features/certificate-oeko-tex-standard-100>)
- ✓ All-in-One para conseguir un mejor aspecto de los conductos (<http://fabricair.biz/es/fabricair-ducts/features/all-one-para-conseguir-un-mejor-aspecto-de-los-conductos>)

PROFILES



http://fabricair.biz/es/duct_shape/round
Round

http://fabricair.biz/es/duct_shape/round

http://fabricair.biz/es/duct_shape/half-round
Half-round

http://fabricair.biz/es/duct_shape/half-round

http://fabricair.biz/es/duct_shape/semi-oval
Semi-oval

http://fabricair.biz/es/duct_shape/semi-oval

http://fabricair.biz/es/duct_shape/half-round

http://fabricair.biz/es/duct_shape/semi-oval




http://fabricair.biz/es/duct_shape/rectangular

Rectangular

http://fabricair.biz/es/duct_shape/rectangular

FLOW MODELS




<http://fabricair.biz/es/flow-types/microflow>
MicroFlow™

<http://fabricair.biz/es/flow-types/microflow>

<http://fabricair.biz/es/flow-types/microflow>

With MicroFlow™ the air




<http://fabricair.biz/es/flow-types/perfoflow>
PerfoFlow™

<http://fabricair.biz/es/flow-types/perfoflow>

<http://fabricair.biz/es/flow-types/perfoflow>


With PerfoFlow™ the air



<http://fabricair.biz/es/flow-types/sonicflow>
SonicFlow™

<http://fabricair.biz/es/flow-types/sonicflow>


<http://fabricair.biz/es/flow-types/sonicflow>



<http://fabricair.biz/es/flow-types/oriflow>
OriFlow™

<http://fabricair.biz/es/flow-types/oriflow>


<http://fabricair.biz/es/flow-types/oriflow>



<http://fabricair.biz/es/flow-types/nozzflow>
NozzFlow™

<http://fabricair.biz/es/flow-types/nozzflow>

<http://fabricair.biz/es/flow-types/nozzflow>



<http://fabricair.biz/es/flow-types/jetflowtm>
JetFlow™

<http://fabricair.biz/es/flow-types/jetflowtm>

<http://fabricair.biz/es/flow-types/jetflowtm>

DATA SHEET

CONSTRUCTION

Fabric type:	Polyester	
Weight	285 g/m ² 8.50 oz/yd ²	EN ISO 12127:1997 (ASTM D3776-96) ()
Grosor:	0,45 [0.018] mm [inch]	EN ISO 5084:1996 (ASTM D1777-96)
Permeability:	0 (±5%) m ³ /m ² /h at 120 Pa 0 (±5%) [CFM/ft ² at 0.5" Static]	EN ISO 9237:1995 (ASTM D737, Frazier)

PROPERTIES

Strength - Warp:	2700 N	EN ISO 13934-1
Strength - Weft:	900 N	EN ISO 13934-1
Shrinkage:	0.5 % Max. °C [°F]	EN ISO 5077 (http://www.iso.org/iso/catalogue_detail.htm?csnumber=41877)
Heat resistance - continuous:	+140 [+284] °C [°F]	
Heat resistance - softening:	+235 [+455] °C [°F]	

TREATMENT/COATINGS

CODE COMPLIANCE

GB 8624:	B-s1,d0,t1	GB 8624 (http://fr.polymerinsights.com/codes-and-standards/country/china/gb-8624)
----------	------------	---

PERFORMANCE CERTIFICATES

ADDITIONAL APPROVALS

OEKO-TEX®:	Approved	
	OEKO-TEX® Standard 100 (http://fabricair.eu/en/fabric/trevira-basic#overlay=fabricair-ducts/features/certificate-oeko-tex-standard-100)	
All-in-One available:	Yes (http://fabricair.biz/es/about-fabricair#overlay=en/fabricair-ducts/features/all-one-better-looking-ducts)	

Disclaimer

FabricAir® believes that all data, statements, technical information, etc., listed in this Technical Data Sheet regarding the product and the use of the product are accurate and reliable. However, the product will only be covered by FabricAir®'s guarantees or warranty if the final use for the product has been approved by FabricAir® in writing. No representative is authorized to approve the final use of the product on behalf of FabricAir®.

VARIATIONS OF THE FABRIC

Combi

		Permeable	Flame Retardancy
(http://fabricair.biz/es/flag/flag/all_fabric_features/684?destination=print2pdf/fabric/combi-65&token=ae54d58345e097e04c30fc122e26aaaa&has_js=1)	Combi 20 (http://fabricair.biz/en/fabric/combi-20)	✓ (http://fabricair.biz/es/fabricair-ducts/features/permeable)	Flame Retardant (http://fabricair.biz/es/fabricair-ducts/features/flame-retardant-fabric)
(http://fabricair.biz/es/flag/flag/all_fabric_features/6980?destination=print2pdf/fabric/combi-65&token=b9ea22564a44d1b35b2dc9a3d86b1446&has_js=1)	Combi 30 (http://fabricair.biz/en/fabric/combi-30)		Flame Retardant (http://fabricair.biz/es/fabricair-ducts/features/flame-retardant-fabric)
(http://fabricair.biz/es/flag/flag/all_fabric_features/683?destination=print2pdf/fabric/combi-65&token=61fb7dc6ebbd7db8811db93b0cbbc672&has_js=1)	Combi 60 (http://fabricair.biz/en/fabric/combi-60)	✓ (http://fabricair.biz/es/fabricair-ducts/features/permeable)	
(http://fabricair.biz/es/flag/flag/all_fabric_features/6875?destination=print2pdf/fabric/combi-65&token=ea1d29475ae4b4543eaad7e7021b51c3&has_js=1)	Combi 65 (http://fabricair.biz/en/fabric/combi-65)		
(http://fabricair.biz/es/flag/flag/all_fabric_features/682?destination=print2pdf/fabric/combi-65&token=dc1fc74ac8ca6fdc6fb67fac4b768ff7&has_js=1)	Combi 70 (http://fabricair.biz/en/fabric/combi-70)	✓ (http://fabricair.biz/es/fabricair-ducts/features/permeable)	Flame Retardant (http://fabricair.biz/es/fabricair-ducts/features/flame-retardant-fabric)
(http://fabricair.biz/es/flag/flag/all_fabric_features/681?destination=print2pdf/fabric/combi-65&token=a2d4ac3023178b46f462deb840c4d366&has_js=1)	Combi 80 (http://fabricair.biz/en/fabric/combi-80)	✓ (http://fabricair.biz/es/fabricair-ducts/features/permeable)	Flame Retardant (http://fabricair.biz/es/fabricair-ducts/features/flame-retardant-fabric)
(http://fabricair.biz/es/flag/flag/all_fabric_features/680?destination=print2pdf/fabric/combi-65&token=3ef18b756f6da3a2babdbb681c59816d&has_js=1)	Combi 85 (http://fabricair.biz/en/fabric/combi-85)		Flame Retardant (http://fabricair.biz/es/fabricair-ducts/features/flame-retardant-fabric)

(http://fabricair.biz/es/flag/flag/all_fabric_features/664?destination=print2pdf/fabric/combi-65&token=6236fd5319c4b83a5f1be687b2036a09&has_js=1)	Combi 90	Permeable	Flame Retardancy
			Flame Retardant

[[Compare selection \(http://fabricair.biz/es/fabricair-ducts/features-comparison\)](http://fabricair.biz/es/fabricair-ducts/features-comparison).]

CERTIFICATE COMPARISON

	Combi 20	Combi 30	Combi 60	Combi 65	Combi 70	Combi 80	Combi 85	Combi 90
EN 13501-1	B-s1,d0	B-s1,d0			B-s1,d0	B-s1,d0	B-s1,d0	B-s1, d0
UL 723	Yes	Yes			Yes	Yes	Yes	Yes
ULC S102.2	Yes		Yes		Yes	Yes	Yes	Yes
GB 8624	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0,t1	B-s1,d0t1
UL 2518	Yes	Yes			Yes	Yes	Yes	Yes
GOST	Yes				Yes	Yes	Yes	Yes
Oeko-Tex Standard 100	Approved	Approved	Approved	Approved	Approved	Approved	Approved	Approved

Buscar

Suscríbese a nuestro boletín de noticias (<http://fabricair.biz/es/subscribe>)

[f \(https://www.facebook.com/FabricAir\)](https://www.facebook.com/FabricAir)
[t \(https://twitter.com/fabricair\)](https://twitter.com/fabricair)
[in \(https://www.linkedin.com/company/fabricair-a-s\)](https://www.linkedin.com/company/fabricair-a-s)
[You Tube \(https://www.youtube.com/fabricair\)](https://www.youtube.com/fabricair)
[v \(https://vimeo.com/fabricair\)](https://vimeo.com/fabricair)

[Closing days \(http://fabricair.biz/es/about-fabricair/closing-days\)](http://fabricair.biz/es/about-fabricair/closing-days)
[Privacy policy \(http://fabricair.biz/es/about-fabricair/privacy-policy\)](http://fabricair.biz/es/about-fabricair/privacy-policy)
[Color Selection](#)

[Disclaimer \(http://fabricair.biz/es/color-selection-disclaimer-0\)](http://fabricair.biz/es/color-selection-disclaimer-0)
[Trade shows \(http://fabricair.biz/es/about-fabricair/trade-shows\)](http://fabricair.biz/es/about-fabricair/trade-shows)
[Videos](#)

<http://fabricair.biz/es/about-fabricair/videos>
[FAQ \(http://fabricair.biz/es/fabricair-ducts/features/features\)](http://fabricair.biz/es/fabricair-ducts/features/features)